



# DLPlus mini-trunking 32 x 16 and 40 x 20 profiles and finishing accessories

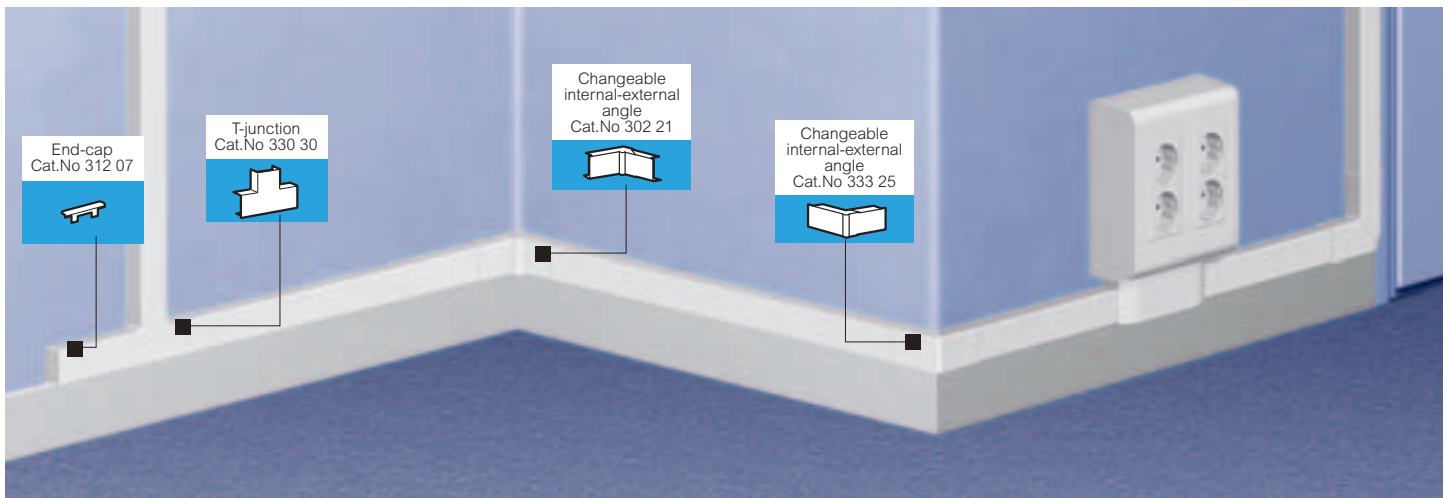

Selection chart (p. 686-687)  
 Wiring capacity chart (p. 692)

Pack	Cat.Nos		Mini-trunking with cable grip
60 <sup>(1)</sup>   48 <sup>(1)</sup>	32 x 16 308 04	40 x 20 300 27	NF C 68-104 approved Equipped with an integrated device for holding cables in place <b>Without central partition</b> Length 2.10 m




Pack	Cat.Nos		Finishing accessories
10	32 x 16 312 07	40 x 20 312 11	End cap
10	333 25	302 81	Changeable internal-external angle
10	333 27	302 83	Changeable flat angle
10	333 30	302 16	Flat T-junction

Pack	Cat.Nos		Oteo frames
10	32 x 16 314 56	40 x 20 314 08	Supplied with end cap and divider for separation of currents <b>Installation alongside the mini-trunking</b> For vertical or horizontal mounting 1 gang
5	314 66	314 18	2 gang

Pack	Cat.Nos		Mosaic frames
10	32 x 16 316 41	40 x 20 316 47	<b>Adaptors for mounting Mosaic wiring frame at end of the mini-trunking</b> For 32 x 16 and 40 x 20 mini-trunking
10	32 x 16 317 04	40 x 20 317 07	<b>Adaptors for mounting Mosaic wiring frame alongside the mini-trunking</b> For Mosaic frames Cat.Nos 316 11 and 316 12
5	317 05	317 08	For Mosaic frames Cat.Nos 316 13 and 316 21
5	317 06	317 09	For Mosaic frames Cat.Nos 316 14 and 316 22

**Connection of luminaires** (p. 691)

**Junction boxes** (p. 691)



**Frames for**

- Mosaic
- BS wiring accessories
- 60 mm fixing centers wiring accessories

**see p. 691**

(1) Number of meters in pack