


LCS Legrand cabling system

patch cords and user cords

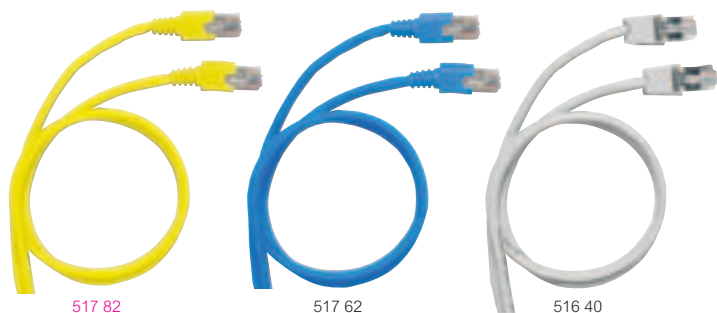

Technical characteristics (p. 799)

RJ 45 - RJ 45 straight
Conform to standards ISO 11801 ed. 2.0, EN 50173-1 et EIA/TIA 568

Patch cords and user cords RJ 45 10 G base T

Pack	Cat.Nos	
		Yellow RAL 7018
		SF/UTP (previously STP) shielded, impedance 100 Ω LSZH
5	517 80	Length 1 m
5	517 81	Length 2 m
5	517 82	Length 3 m
5	517 83	Length 5 m

Patch cords and user cords RJ 45 cat. 6


Pack	Cat.Nos	
		Blue RAL 5015
		U/UTP (previously UTP) unshielded, impedance 100 Ω PVC
5	517 72	Length 1 m
5	517 73	Length 2 m
5	517 74	Length 3 m
5	517 75	Length 5 m
		F/UTP (previously FTP) screened, impedance 100 Ω LSZH
5	517 62	Length 1 m
5	517 63	Length 2 m
5	517 64	Length 3 m
5	517 65	Length 5 m
		SF/UTP (previously SFTP) shielded, impedance 100 Ω LSZH
5	517 52	Length 1 m
5	517 53	Length 2 m
5	517 54	Length 3 m
5	517 55	Length 5 m

Patch cords and user cords RJ 45 cat. 5

Pack	Cat.Nos	
		Grey RAL 7035
		Special lengths of cords on request
		U/UTP (previously UTP) unshielded, impedance 100 Ω PVC
5	516 36	Length 1 m
5	516 37	Length 2 m
5	516 38	Length 3 m
5	516 39	Length 5 m
5	516 90	Length 30 cm
5	517 45	Length 60 cm
		F/UTP (previously FTP) unshielded, impedance 100 Ω LSZH
5	516 40	Length 1 m
5	516 41	Length 2 m
5	516 42	Length 3 m
5	516 91	Length 30 cm
5	517 17	Length 60 cm
		SF/UTP (previously SFTP) shielded, impedance 100 Ω PVC
5	516 85	Length 60 cm

LCS Legrand cabling system

cables

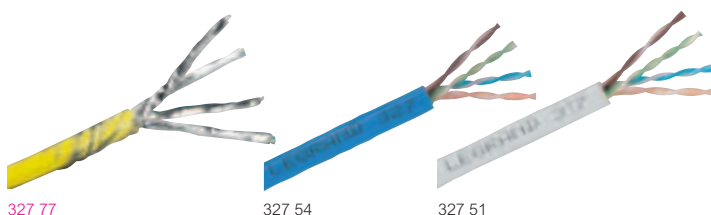

Technical characteristics (p. 799)

4 twisted pair cables 100 ohms
Conform to standards ISO/IEC 11801 ed. 2.0, EN 50173-1 and EIA/TIA 568 EIA/TIA colour code

Pack	Cat.Nos	
		Cable for cat. 7 and 10 Giga local area networks
		LSZH sleeve: zero halogen Yellow RAL 7018
		Cat. 7 - S/FTP (previously SSTP) - 4 pairs
500 ⁽¹⁾	327 77	Performance 600 MHz Length 500 m Supplied on reel Weight 25 kg
		10 Giga - F/UTP (previously FTP) - 4 pairs
500 ⁽¹⁾	327 78	Performance 500 MHz Length 500 m Supplied on reel Weight 25 kg

LAN cables cat. 6

Pack	PVC sleeve	LSZH sleeve	
			PVC sleeve: flame retardant LSZH sleeve: zero halogen Cable: blue RAL 5015
			U/UTP (previously UTP) - 4 pairs
305 ⁽¹⁾	327 55	327 54	Length 305 m Supplied on reel Weight 16 kg
			U/UTP (previously UTP) - 2 x 4 pairs
500 ⁽¹⁾	327 75		Length 500 m Supplied on reel Weight 38 kg
			F/UTP (previously FTP) - 4 pairs
500 ⁽¹⁾	327 58	327 56	Length 500 m Supplied on reel Weight 25 kg
			F/UTP (previously FTP) - 2 x 4 pairs
500 ⁽¹⁾		327 76	Length 500 m Supplied on reel Weight 48 kg
			SF/UTP (previously SFTP) - 4 pairs
500 ⁽¹⁾	327 59	327 57	Length 500 m Supplied on reel Weight 29 kg

LAN cables cat. 5e

Pack	PVC sleeve	LSZH sleeve	
			PVC sleeve: flame retardant LSZH sleeve: zero halogen Cable: grey RAL 7035 - EIA/TIA colour code
			U/UTP (previously UTP) - 4 pairs
305	327 51	327 50	Length 305 m Supplied in cardboard box Weight 10 kg
			U/UTP (previously UTP) - 2 x 4 pairs
500 ⁽¹⁾	327 73		Length 500 m Supplied on reel Weight 29 kg
			F/UTP (previously FTP) - 4 pairs
500 ⁽¹⁾	327 53	327 52	Length 305 m Supplied in cardboard box Weight 12 kg
			F/UTP (previously FTP) - 2 x 4 pairs
500 ⁽¹⁾		327 74	Length 500 m Supplied on reel Weight 38 kg

(1) Number of metres contained in the package